

NEW

HardwaxOil

Film forming hardwax oil

From raw wood look to color design: velvety feel with high durability

HardwaxOil fully brings out the beauty and character of the wood, whether you are looking to create an oiled appearance, a raw wood look or intensive color accents in combination with 2K ImpactOil Color. HardwaxOil forms a durable, anti-slip layer that reliably protects against moisture and dirt. It is based on modern raw materials with no harmful oximes or cobalt. It's particularly safe to use – thanks to optimum application properties!



Loba GmbH & Co. KG
Lösungen für alle Oberflächen
mit 100% Kundenzufriedenheit
2022-09-03



Oxime- and cobalt-free



LOBA HardwaxOil products – full-bodied look and velvety feel

The LOBA HardwaxOil products are based on a modern formulation with no harmful oximes or cobalt. They also have excellent application properties. HardwaxOil combines the natural, full-bodied look and velvety feel of an oil with a high resistance and dirt-repellent properties almost comparable to a finish.

Application videos
LOBA Oils



Benefits at a glance

- Oxime- and cobalt-free
- Smooth, natural and full-bodied look
- Suitable for partial repairs
- Safe and particularly easy to apply
- Fast drying
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas (R10)
- Suitable for children's toys as per DIN EN 71-3
- Silky smooth feel
- Dirt resistant and easy to clean

Range of use

Suitable for hardwood floors and cork floors (HardwaxOil Transparent) in low- to normal-traffic areas and even in high-traffic areas with regular care. Can be used on almost all European wood varieties and exotic wood types. You will find more information at www.loba.de/int_en/downloads under Range of use.

HardwaxOil

The same properties for all gloss levels.



Roller application* for wood and cork floors:

- Apply a thin, even coating of HardwaxOil using the LOBA microfiber oil roller 60 – 80 or LOBA oil brush (approx. 40 – 60 ml/m² | 20 m²/l).
- Drying time of at least 8 hours, max. 24 hours.
- Perform intermediate sanding using LOBASAND GridPad fitted with a LOBASAND Hook & Loop strip and remove all dust.
- Apply a thin, even coating of HardwaxOil using the LOBA microfiber oil roller 60 – 80 or LOBA oil brush (approx. 40 – 60 ml/m² | 20 m²/l).
- For highly absorbent surfaces, an additional roller application may be required after intermediate sanding with LOBASAND GridPad fitted with a LOBASAND Hook & Loop strip to achieve full homogeneous coverage.

* Can also be applied using a spatula and roller as for HardwaxOil Nature, see below.

Article No.: 10509-000003

Gloss levels: semi-gloss, satin, extra-matte

Available in 750 ml, 2.5 l, 10 l



HardwaxOil



HardwaxOil Nature

Our HardwaxOil Nature gives an impressive untreated raw wood look. Its special composition reduces grain accentuation typically produced by oil.



Spatula and roller application for hardwood floors:

- Carefully apply HardwaxOil Nature in sections using a LOBA finishing spatula (approx. 20 ml/m² | 50 m²/l).
- Smooth out immediately using a single-disc machine fitted with a beige LOBASAND SpecialPad.
- Drying time of at least 8 hours, max. 24 hours.
- Apply a thin, even coating of HardwaxOil Nature using the LOBA microfiber oil roller 60 – 80 (approx. 40 – 60 ml/m² | 20 m²/l).
- For highly absorbent surfaces, an additional roller application may be required after intermediate sanding with LOBASAND GridPad fitted with a LOBASAND Hook & Loop strip to achieve full homogeneous coverage.

Article No.: 10509-000009


Available in 750 ml, 2.5 l



HardwaxOil
Nature



Versatile color design for hardwax oil

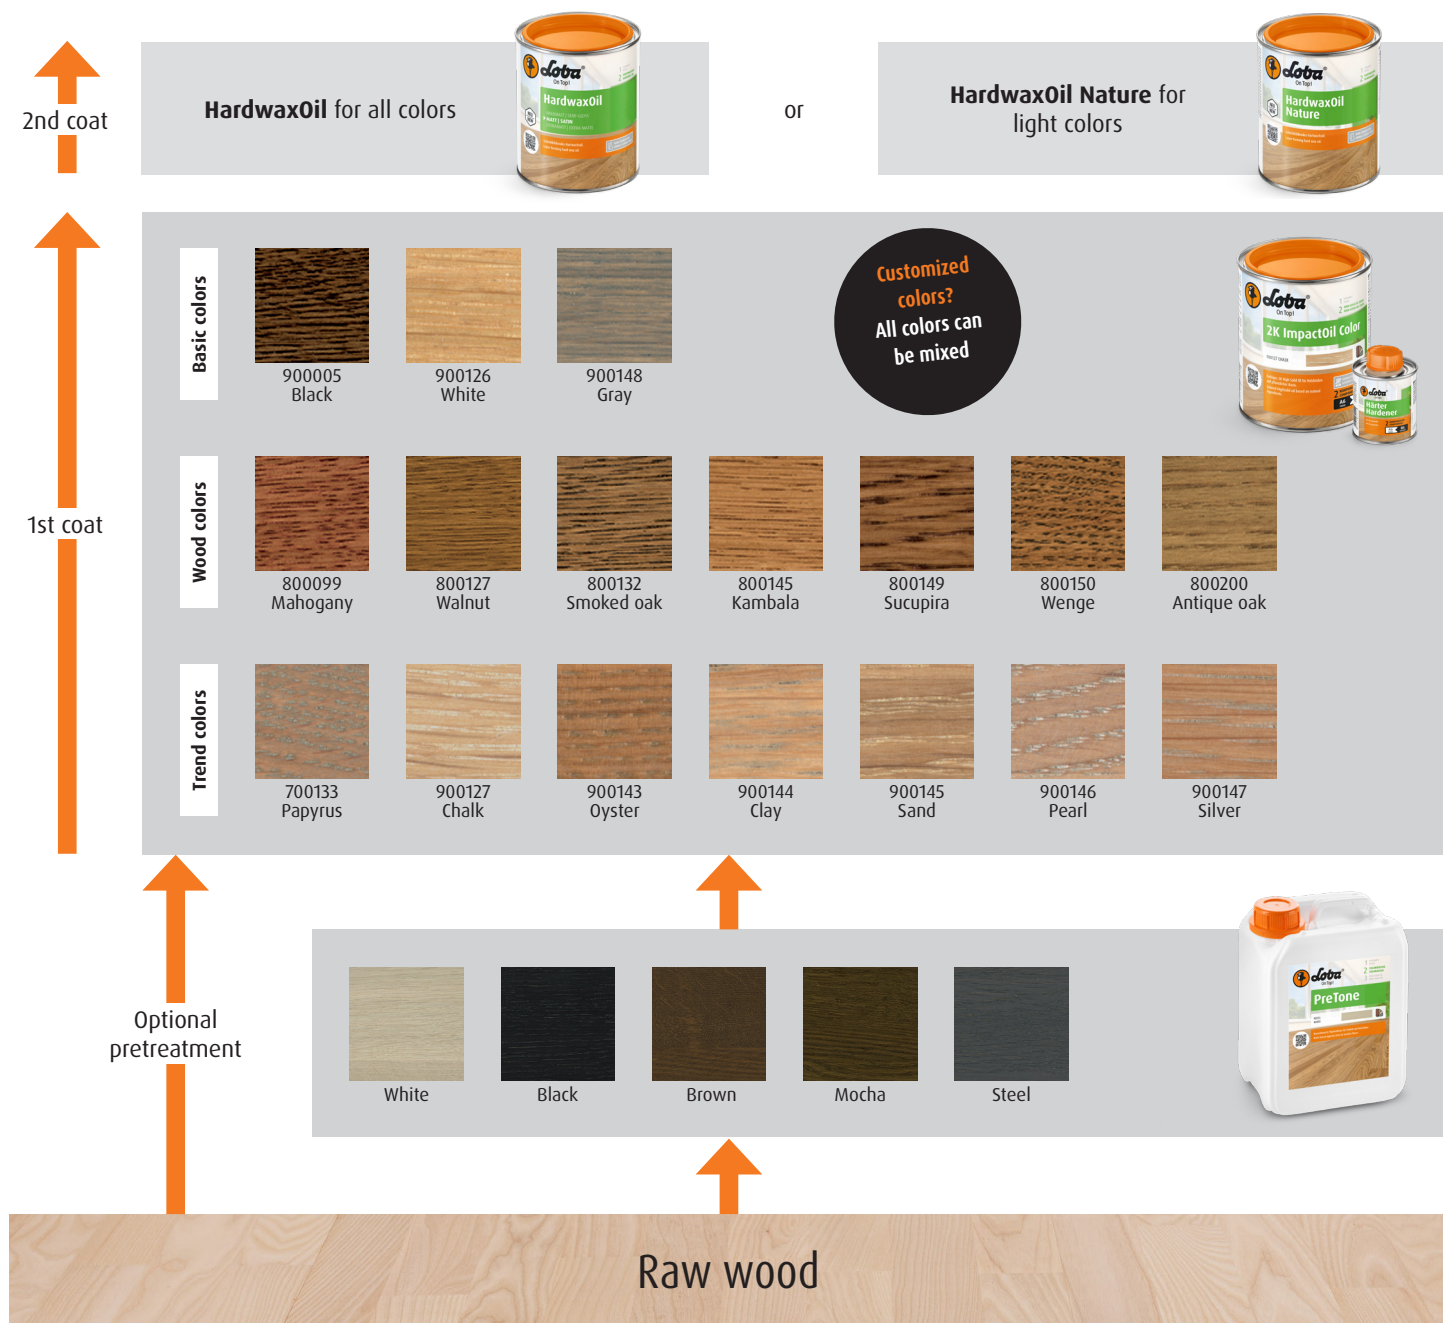

Customize your own feel-good color shades - with 17 nuances of 2K ImpactOil Color that can be mixed with each other and color intensification using PreTone

Color design* | optional pretreatment and 1st coat

- See our sanding recommendations for coloration.
- Optional pretreatment with PreTone to intensify the colors.
- Apply 2K ImpactOil Color using a finishing spatula and wait for it to penetrate.
- Approximately 20 minutes after beginning the application, smooth out using a single-disc machine and beige SpecialPad.
- Consumption per coat: approx. 30 g/m².
- Can be walked on after 12 hours, HardwaxOil can be applied after 24 hours.

* Color design is also possible using Markant Color.

Finishing | 2nd coat

- Apply HardwaxOil or HardwaxOil Nature (only on lighter colors).
- For highly absorbent surfaces, an additional coat may be required after intermediate sanding with LOBASAND GridPad fitted with a LOBASAND Hook & Loop strip to achieve full homogeneous coverage.

Initial care

- For information, see reverse side.

Always read the information on how to apply the products!

PreTone



2K ImpactOil Color



Suitable tools



Trowel

Article No.: 16083-0000...



SpecialPad beige

Article No.: 16550-406410



GridPad

Article No.: 16560



Hook & Loop strip

Article No.: 17060-000240



Microfiber oil roller

60-80

Article No.: 16236-100000

Cleaning and caring for oiled surfaces – film forming

Refresh

Finish care and maintenance care



Article No.: 10046

Available in 1l and 10l

GISCODE GU40



Permanent OilCare

Permanent care



Article No.: 10190

Available in 1l

GISCODE Ö60+



Cleaner

Maintenance cleaning



Article No.: 10175

Available in 1l and 10l

GISCODE GU73



ParkettSoap

Intensive cleaning



Article No.: 10048

Available in 1l and 5l

GISCODE GU70



Always follow the recommended steps for cleaning and care in our care instructions at www.loba.de

Any questions?

We look forward to hearing from you:

LOBA GmbH & Co. KG
Leonberger Str. 56-62
71254 Ditzingen | Germany
Tel.: +49 7156 357-0
Email: service@loba.de
www.loba.de

→ This flyer was printed on paper from sustainably managed forests and with bio-oil-based inks.